


HALF HEIGHT SWING BARRIER GATE - ST-SB-208

Features of Half Height Swing Barrier Gate - ST-SB-208

- ✓ Swing barrier with 6 pairs of IR lights is designed to detect unauthorized entrance or exit.
- ✓ LED light indicates passing direction
- ✓ The machine cover is high-grade black cotton covered with anti-condensation.
- ✓ Self-detection, Self-diagnostics, and standard 92mm fan negative pressure exhaust
- ✓ Valid passing duration settings: System will cancel trespassing permission if a person does not pass through the lane within the valid passing duration
- ✓ Door remaining open when fire alarm triggered
- ✓ Barrier will automatically open when powering down

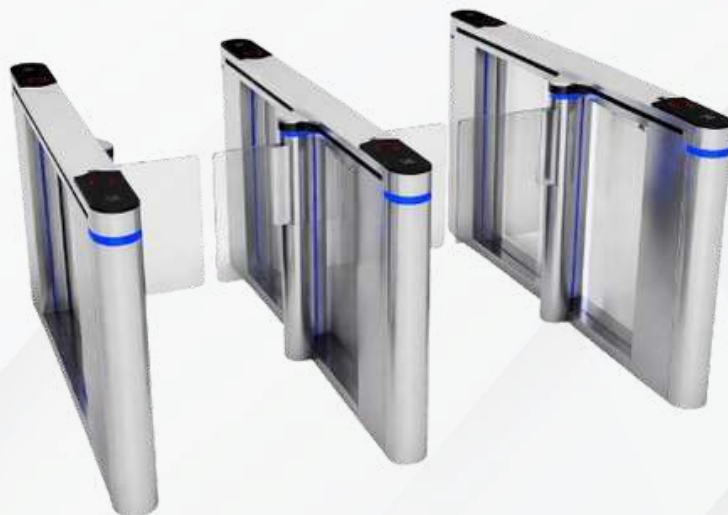

Singapore

Singapore : www.smartouch.com.sg

Office : +(65) 6396 4767 /

Mr. kenny : +(65) 9088 4767

Mr. Marco : +(65) 8122 0804

Email : sales@smartouch.com.sg

Malaysia

Malaysia : www.smartouch.com.my

Office : +607-388 9903

Mr. Kenny : 012-7883383

Email : sales@smartouch.com.my

HALF HEIGHT SWING BARRIER GATE - ST-SB-208

Specification of Half Height Swing Barrier Gate - ST-SB-208

Description	Parameter
Motor	Brushless DC motor, encounter resistance rebound, anti impact
Traffic Speed	more than 30 persons per minute The actual throughput is affected by the person passing rate and passing method.
Power supply method	AC220V±10%; 50Hz°
IR light detectors	6 pairs
Working temperature	-10 °C to 50 °C
Lane width	600mm – 1000mm
Barrier door material	Transparent acrylic
Working humidity	10% to 90% (No Condensing)
Pedestal material	SUS304 stainless steel
Dimensions	1200 mm (L) x 120 mm (W) x 1000 mm (H)



Singapore

Singapore : www.smartouch.com.sg



Office : +(65) 6396 4767 /

Mr. kenny : +(65) 9088 4767

Mr. Marco : +(65) 8122 0804

Email : sales@smartouch.com.sg

Malaysia

Malaysia : www.smartouch.com.my

Office : +607-388 9903

Mr. Kenny : 012-7883383

Email : sales@smartouch.com.my